

**You are cordially invited to attend a pre-construction open house for the Lakeview Parkway Widening and Resurfacing Project.**

Business owners and residents are encouraged to attend to meet the construction team, ask questions, and review the construction schedule, staging, and detour plan.

3:00 p.m.–7:00 p.m.  
Sullivan Center  
635 N Aspen Drive



Dedicated left turn lane will be added to eastbound Hawthorn

**Thank You**

for your patience during construction. Our success on the Lakeview Parkway Project is only possible through your help. Please avoid the work zone when you can.



**Lakeview Parkway Widening and Resurfacing Project**

**Pre-Construction Open House**

**Tuesday, April 18th, 2023**

3:00 p.m.–7:00 p.m.  
Sullivan Center, 635 N Aspen Drive



**Project Team & Contacts**

**Village of Vernon Hills**  
Public Works & Engineering  
847-367-3726

**Civiltech Engineering, Inc.**  
Mr. Brian J. Carroll, P.E.  
Senior Resident Engineer

For more project information and to sign up for schedule updates, please visit our website:  
[www.VHLakeview.com](http://www.VHLakeview.com)



Village of Vernon Hills  
290 Evergreen Drive  
Vernon Hills, IL 60061



Village of Vernon Hills  
290 Evergreen Drive  
Vernon Hills, IL 60061

## What to Expect

- **Traffic Staging** - One through lane in each direction will remain open. One left turn lane will remain open on each leg of intersections.
- **Driveway Access and Parking** - Driveway access will be maintained through the project duration. This will be accomplished with temporary stone, working on driveways half at a time, and/or alternating work on properties with multiple driveways.
- **Daily Work Hours** - Potentially six days per week as project activity dictates. There may be a need for occasional overnight work as well.
- **Dust Control** - Dust control measures will be implemented and monitored.
- **Construction Safety** - This type of work requires heavy machinery. Please exercise caution near construction zone.



Bike path reconstruction along Lakeview


## Project Schedule

Construction will begin in May 2023 with completion in December 2023, and final tree planting in spring 2024.

## Project Details

- 2000' of resurfacing
- 3300' of widening/resurfacing
- 1800' of reconstructed bike path
- 400' of new sidewalk
- Replace streetlights, upgrade to LED
- Replace traffic signals
- Upgraded Sidewalk Curb Ramps
- Additional through lane capacity on Lakeview
- New dedicated eastbound left turn lane on eastbound Hawthorn at Lakeview
- Additional left turn lane on northbound Lakeview at Hawthorn

## Lakeview Parkway Widening & Resurfacing Project

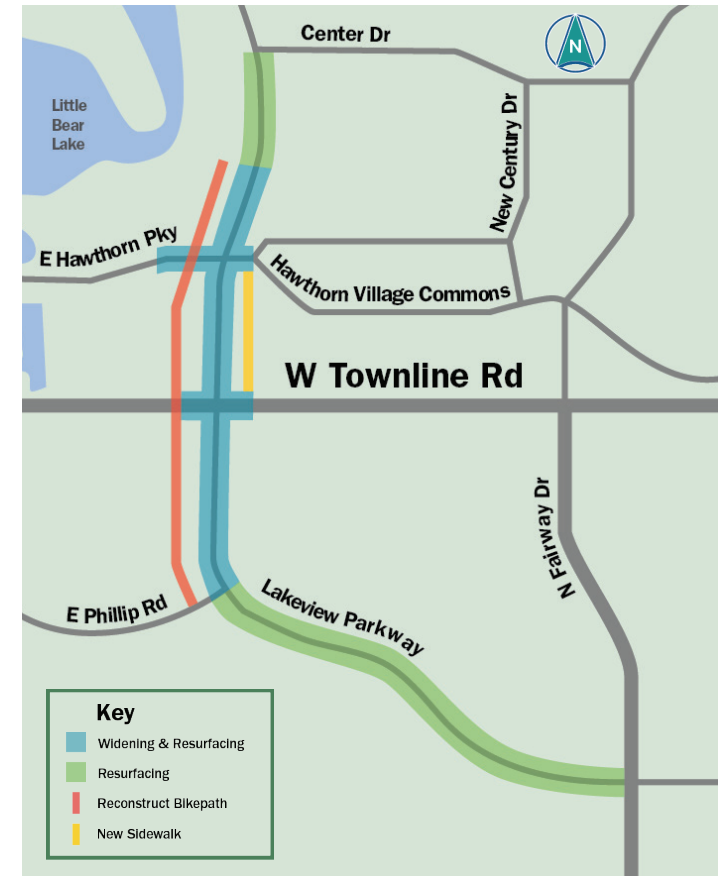

## Typical Roadway Resurfacing Consists of:


Widening  
4" Asphalt Surface  
9" Asphalt Base  
12" Stone

Additional thru lane south of Hawthorn Pkwy

Additional turn lane at Hawthorn Pkwy

Resurfacing Min 4" New Asphalt Surface

Additional thru lane south of Route 60

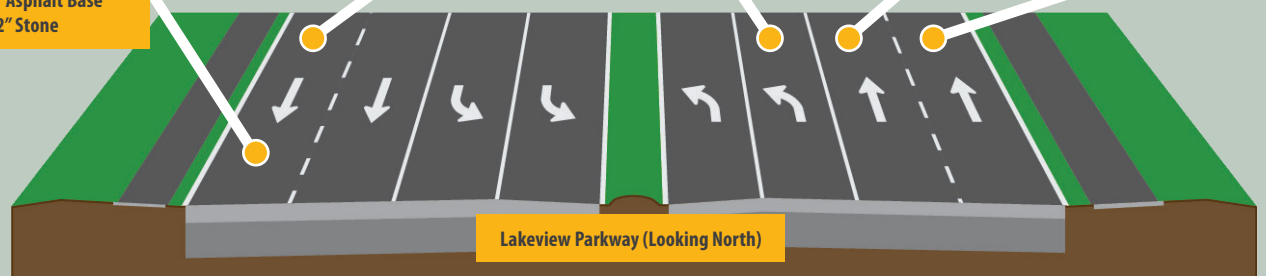

Lakeview Parkway (Looking North)